

## SAIL-M12GM8SG-4S15UIE

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)



The most reliable way of achieving connections between two I/O slaves or between the control and one I/O subscriber is by way of pre-assembled cables. The line of cables covers PROFIBUS, CANopen, DeviceNet™, EtherCAT and Ethernet.

### General ordering data

Version	Bus line, Connecting line, M12 / M8, Number of poles: 4, 15 m, Male, straight - male, straight, Shielded: Yes, LED: No, Sheath material: PUR, Halogen: No
Order No.	<a href="#">1296791500</a>
Type	SAIL-M12GM8SG-4S15UIE
GTIN (EAN)	4050118110975
Qty.	1 pc(s).

Creation date March 23, 2021 2:55:43 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

## SAIL-M12GM8SG-4S15UIE

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

Net weight 466 g

### Environmental Product Compliance

REACH SVHC Lead 7439-92-1

### Technical specifications for cable

Acceleration	5 m/s <sup>2</sup>	
Bending cycles	5 Mio	
Bending radius, min., moving	7.5 x cable diameter	
Bending radius, min., stationary	4 x cable diameter	
Cable length	15 m	
Colour coding	blue, orange, white / blue, white / orange	
Configurable cable length	No	
Core cross-section	0.15 mm <sup>2</sup>	
Halogen	No	
Housing main material	PUR	
Hybrid cable	No	
Insulation	PP	
Irradiation crosslinked	No	
Number of poles	4	
Number of poles	4	
Outer cladding in accordance with UL AWM style	20963 (80 °C / 30 V)	
Outer diameter	4.8 - 0.3 mm	
Outside diameter	Diameter	4.8 mm
	Signs	±
	Tolerance	0.3 mm
Outside diameter	4.8 mm ± 0.3 mm	
Resistant to welding beads	No	
Sheath material	PUR	
Sheathing colour	green	
Shielded	Yes	
Speed	180 m/min	
Suitable for cable carriers	Yes	
Temperature range, stationary	-40...80 °C	
Temperature range, stationary, max.	80 °C	
Temperature range, stationary, min.	-40 °C	

### General technical data

Connection thread	M12 / M8	Contact surface	Gold-plated
Housing main material	PUR	Insulation strength	10 <sup>8</sup> Ω
LED	No	Plugging cycles	≥ 100
Pollution severity	3	Protection degree	IP67
Rated current	4 A	Rated voltage	30 V
Temperature range of housing	-25...+80 °C	Threaded ring material	Brass, nickel-plated
Tightening torque	M8: 0.5 - 0.6 Nm, M12: 0.8 - 1.2 Nm	Version	Male, straight - male, straight
jumpered	No		

Creation date March 23, 2021 2:55:43 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**SAIL-M12GM8SG-4S15UIE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Electrical properties**

Insulation strength	10 <sup>8</sup> Ω	Rated voltage	30 V
---------------------	-------------------	---------------	------

**Cable structure**

Colour coding	blue, orange, white / blue, white / orange	Insulation	PP
Sheathing colour	green		

**Electrical properties of cable**

Insulation strength	10 <sup>8</sup> Ω	Rated current	4 A
Speed	180 m/min		

**Mechanical and material properties of cable**

Acceleration	5 m/s <sup>2</sup>	Bending cycles	5 Mio
Halogen	No	Speed	180 m/min

**Plug, right**

Contact surface	Gold-plated	Housing main material	PUR
Plugging cycles	≥ 100		

**Classifications**

ETIM 6.0	EC002599	ETIM 7.0	EC002599
ECLASS 9.0	27-06-03-08	ECLASS 9.1	27-06-03-08
ECLASS 10.0	27-06-03-08	ECLASS 11.0	27-06-03-08

**Approvals**

Approvals



ROHS

Conform

**Downloads**Engineering Data [EPLAN, WSCAD](#)

**SAIL-M12GM8SG-4S15UIE**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com


**Drawings**

**Dimensioned drawing**




Male, straight


**Pole scheme**

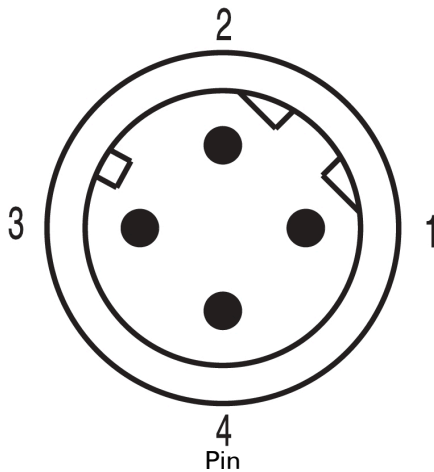

**Wiring diagram**

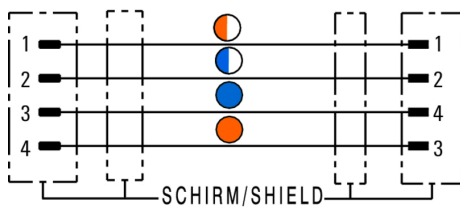


**Dimensioned drawing**

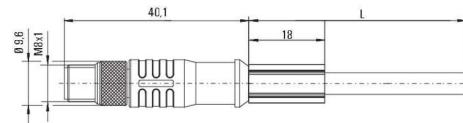

Male, straight

**Pole scheme**



Male connector

**The ideal tool: Screwty® with torque function**



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F