

IE-BS-V04P-SCRJ2SC-SM-C**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



PushPull plug-in connector set according to IEC
61076-3-106 ver.4 (IEC24702), plastic with SC insert

General ordering data

Version	Flange FO, IP67, Version 4, coupling from SCRJ on 2*SC, Singlemode
Order No.	1963420000
Type	IE-BS-V04P-SCRJ2SC-SM-C
GTIN (EAN)	4032248645510
Qty.	10 pc(s).

Creation date March 26, 2021 3:39:55 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

IE-BS-V04P-SCRJ2SC-SM-C

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	48.3 mm	Depth (inches)	1.902 inch
Height	38 mm	Height (inches)	1.496 inch
Net weight	29.3 g	Width	27 mm
Width (inches)	1.063 inch		

Temperatures

Operating temperature	-40 °C...70 °C
-----------------------	----------------

General data

Colour	Miscellaneous	Connection 1	SC
Connection 2		Description of article	Version 4, coupling from SCRJ on 2*SC
Fibre type	SCRJ	Housing main material	PA UL 94 V0
Insertion loss	Singlemode	Plugging cycles	500
Protection degree	≤ 0.5 dB	Return loss (attenuation)	≥ 40 dB
	IP67		

General standards

Connector standard	IEC 61076-3-106 Var. 4, IEC 61754-4, IEC 61754-24
--------------------	---

Classifications

ETIM 6.0	EC001122	ETIM 7.0	EC001122
ECLASS 9.0	19-17-01-22	ECLASS 9.1	19-17-01-22
ECLASS 10.0	19-17-01-22	ECLASS 11.0	19-17-01-22

Approvals

ROHS	Conform
------	---------

Downloads

Approval/Certificate/Document of Conformity	GOST Approval PROFINET Manufacturer's Declaration
Engineering Data	WSCAD
User Documentation	MAN IE GUIDE DE MAN IE GUIDE EN Designation key / Type key Manual


IE-BS-V04P-SCRJ2SC-SM-C

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Drawings

Installation cut-out

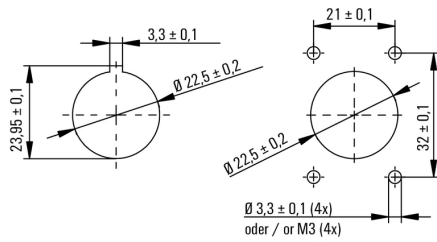

Mounting cut-out: 1. With central screw connection / 2. For mounting with four M3 screws