

SAIL-M12BW-CD-15B**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



The most reliable way of achieving connections between two I/O slaves or between the control and one I/O subscriber is by way of pre-assembled cables. The line of cables covers PROFIBUS, CANopen, DeviceNet™, EtherCAT and Ethernet.

General ordering data

Version	Bus line, One end without connector, M12, Number of poles: 5, 15 m, Shielded: Yes, LED: No, Sheath material: PVC, Halogen: Yes
Order No.	1062181500
Type	SAIL-M12BW-CD-15B
GTIN (EAN)	4050118606447
Qty.	1 pc(s).

Creation date April 15, 2021 11:37:17 AM CEST

Catalogue status 09.04.2021 / We reserve the right to make technical changes.

SAIL-M12BW-CD-15B

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight 1,000 g

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

Technical specifications for cable

Acceleration	5 m/s ²	Bending cycles	3 Mio
Bending radius, min., moving	10 x cable diameter	Bending radius, min., stationary	5 x cable diameter
Cable length	15 m	Colour coding	white, blue, red, black
Configurable cable length	No	Halogen	Yes
Hybrid cable	No	Insulation	PVC
Irradiation crosslinked	No	Number of poles	5
Outer cladding in accordance with UL AWM style	2571 (80 °C)	Outside diameter	7 mm ± 0.3 mm
Resistant to welding beads	No	Sheath material	PVC
Sheathing colour	black	Shielded	Yes
Speed	180 m/min	Suitable for cable carriers	No
Temperature range, moving	-10...80 °C	Temperature range, stationary	-40...80 °C
Wire cross section	2 x 0.34 mm ² + 2 x 0.22 mm ²		

General technical data

Coding	A	Connection thread	M12
Contact surface	Gold-plated	Housing main material	PUR
Insulation strength	10 ⁸ Ω	LED	No
Plugging cycles	≥ 100	Pollution severity	3
Protection degree	IP67	Rated current	4 A
Rated voltage	125 V	Temperature range of housing	-25...+80 °C
Threaded ring material	Brass, nickel-plated	Tightening torque	M12: 0.8 - 1.2 Nm
jumpered	No		

Electrical properties

Insulation strength 10⁸ Ω Rated voltage 125 V

Cable structure

Colour coding	white, blue, red, black	Insulation	PVC
Sheathing colour	black		

Electrical properties of cable

Insulation strength 10⁸ Ω Rated current 4 A
Speed 180 m/min

Mechanical and material properties of cable

Acceleration	5 m/s ²	Bending cycles	3 Mio
Halogen	Yes	Speed	180 m/min

Creation date April 15, 2021 11:37:17 AM CEST

Catalogue status 09.04.2021 / We reserve the right to make technical changes.

SAIL-M12BW-CD-15B

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data**Plug, right**

Contact surface	Gold-plated	Housing main material	PUR
Plugging cycles	≥ 100		

Classifications

ETIM 6.0	EC001855	ETIM 7.0	EC001855
ECLASS 9.0	27-06-03-11	ECLASS 9.1	27-06-03-11
ECLASS 10.0	27-06-03-11	ECLASS 11.0	27-06-03-11

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	STEP
Brochure/Catalogue	Catalogues in PDF-format


SAIL-M12BW-CD-15B

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Drawings

Dimensioned drawing

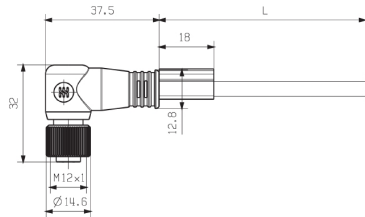


Socket

Pole scheme



Socket

Wiring diagram

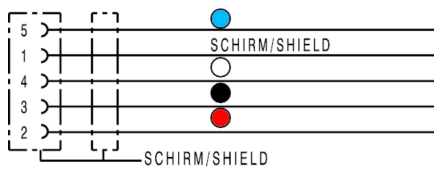

The ideal tool: Screwty® with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F