SIEMENS

Product data sheet

3RT2028-1AB00



CONTACTOR, AC-3, 18.5KW/400V, 1NO+1NC, AC 24V 50HZ, 3-POLE, SZ S0 SCREW TERMINAL

General technical data:				
product brand name	SIRIUS			
Size of the contactor		S0		
Product extension / auxiliary switch		Yes		
Product extension / function module for communication		No		
Protection class IP / on the front		IP20		
Protection against electrical shock		finger-safe		
Degree of pollution		3		
Installation altitude / at a height over sea level / maximum m		2,000		
Ambient temperature				
• during storage °C -55		-55 +80		
• during operating °C		-25 +60		
Shock resistance				
• at rectangular impulse				
• at AC		8,3g / 5 ms, 5,3g / 10 ms		
• at sine pulse				
• at AC		13,5g / 5 ms, 8,3g / 10 ms		
Impulse voltage resistance / rated value	kV	6		
Insulation voltage / rated value	V	690		

Maximum permissible voltage for protective separation / between coil and main contacts / in accordance with EN 60947-1	V	400	
Mechanical operating cycles as operating time			
of the contactor / typical		10,000,000	
of the contactor with added auxiliary switch block / typical		10,000,000	
 of the contactor with added electronics-compatible auxiliary switch block / typical 		5,000,000	
Main circuit:			
Number of NC contacts / for main contacts		0	
Number of NO contacts / for main contacts		3	
Operating current / at AC-1 / at 400 V			
• at 40 °C ambient temperature / rated value	А	50	
• at 60 °C ambient temperature / rated value	А	42	
Connectable conductor cross-section / in main circuit			
• at AC-1			
• at 40 °C / minimum permissible	m²	10	
• at 60 °C / minimum permissible	m²	10	
Operational current			
• at AC-2 / at 400 V / rated value	А	38	
• at AC-3			
• at 400 V / rated value	А	38	
• at 500 V / rated value	А	32	
• at 690 V / rated value	А	21	
• at AC-4 / at 400 V / rated value	А	22	
Operational current			
• with 1 current path / at DC-1			
• at 24 V / rated value	А	35	
• at 110 V / rated value	А	4.5	
• at 220 V / rated value	А	1	
• at 440 V / rated value	А	0.4	
• at 600 V / rated value	А	0.25	
• with 2 current paths in series / at DC-1			
• at 24 V / rated value	А	35	
• at 110 V / rated value	А	35	
• at 220 V / rated value	А	5	
• at 440 V / rated value	А	1	
• at 600 V / rated value	А	0.8	
• with 3 current paths in series / at DC-1			
• at 24 V / rated value	А	35	
• at 110 V / rated value	А	35	

• at 220 V / rated value	А	35
• at 440 V / rated value	А	2.9
• at 600 V / rated value	А	1.4
Operational current		
 with 1 current path / at DC-3 / at DC-5 		
• at 24 V / rated value	А	20
• at 110 V / rated value	А	2.5
• at 220 V / rated value	А	1
• at 440 V / rated value	А	0.09
• at 600 V / rated value	А	0.06
• with 2 current paths in series / at DC-3 / at DC-5		
at 24 V / rated value	А	35
• at 110 V / rated value	А	15
at 220 V / rated value	А	3
• at 440 V / rated value	А	0.27
• at 600 V / rated value	А	0.16
• with 3 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	А	35
• at 110 V / rated value	А	35
at 220 V / rated value	А	10
• at 440 V / rated value	А	0.6
• at 600 V / rated value	А	0.6
Service power		
• at AC-1		
• at 230 V / rated value	kW	16
• at 400 V / rated value	kW	28
• at 500 V / rated value	kW	35
• at 690 V / rated value	kW	48
• at AC-2 / at 400 V / rated value	kW	18.5
• at AC-3		
• at 230 V / rated value	kW	11
• at 400 V / rated value	kW	18.5
• at 690 V / rated value	kW	18.5
• at AC-4 / at 400 V / rated value	kW	11
Active power loss / at AC-3 / at 400 V / with rated operational current value / per conductor	W	3.8
Off-load operating frequency		
• at AC	1/h	5,000
• at DC	1/h	1,500
Frequency of operation		

• at AC-1 / according to IEC 60947-6-2	1/h	1,000
• at AC-2 / according to IEC 60947-6-2	1/h	750
• at AC-3 / according to IEC 60947-6-2	1/h	750
• at AC-4 / according to IEC 60947-6-2	1/h	250

Control circuit:		
Type of voltage / of the controlled supply voltage		AC
Control supply voltage		
• at 50 Hz / at AC / rated value	V	24
operating range factor control supply voltage rated value / of the magnet coil		
• at 50 Hz / for AC		0.8 1.1
Apparent pull-in power / of the solenoid / for AC	V·A	77
Apparent holding power / of the solenoid / for AC	V·A	9.8
Inductive power factor		
• with the pull-in power of the coil		0.82
with the pull-in power of the coil		0.25
Closing delay		
• at AC	ms	8 40
Opening delay		
• at AC	ms	4 16
Arcing time	ms	10 10
Residual current / of electronics / for control with signal <0>		
• at 230 V / with AC / maximum permissible	mA	7
• at 24 V / with DC / maximum permissible	mA	16

Auxiliary	
Auxiliar	

Contact reliability / of the auxiliary contacts		1 faulty switching per 100 million (17 V, 1 mA)	
Number of NC contacts / for auxiliary contacts / instantaneous switching		1	
Number of NO contacts / for auxiliary contacts / instantaneous switching		1	
Operating current / of the auxiliary contacts			
 [nicht versorgt: PMD_ABP551_001_000] 			
•	А	2	
• at 690 V	А	1	
UL/CSA ratings:			

hp	3
hp	5

 for three-phase squirrel cage motors 				
• at 200/208 V / rated value	hp	10		
• at 220/230 V / rated value	hp 10			
• at 460/480 V / rated value	hp	hp 25		
• at 575/600 V / rated value	hp 25			
Operating current (FLA) / for three-phase squirrel cage motors				
• at 480 V / rated value	А	34		
• at 600 V / rated value	А	27		
Contact rating designation / for auxiliary contacts / according to UL		A600 / Q600		
Short-circuit:				
Design of the fuse link				
 for short-circuit protection of the auxiliary switch / required 		fuse gL/gG: 10 A		
for short-circuit protection of the main circuit				
 with type of assignment 1 / required 		gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 100 A		
• at type of coordination 2 / required		gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 35A		
Installation/mounting/dimensions:				
mounting position		+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface		
Type of mounting	_	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022		
Type of fixing/fixation / series installation		Yes		
Width	mm	45		
Height	mm	85		
Depth	mm	97		
Distance, to be maintained, to the ranks assembly / sidewards	mm	0		
Connections:				
Design of the electrical connection				
for main current circuit		screw-type terminals		
for auxiliary and control current circuit		screw-type terminals		
Type of the connectable conductor cross-section				
for main contacts				
• solid		2x (1 2.5 mm²), 2x (2.5 10 mm²)		
finely stranded				
with conductor end processing		2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²		
 for AWG conductors / for main contacts 		2x (16 12), 2x (14 8)		

• solid				2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)		
-	finely stranded					
	with conductor end processing			2x (0.5 1.5 mm²), 2x (
 for AWG conduct 	tors / for auxiliary conta	acts		2x (20 16), 2x (18 14)		
Sicherheitsreleva	nte Kenngrößen:					
B10 value / with hig	h demand rate					
according to SN	31920			1,000,000		
T1 value / for proof	test interval or servio	e life				
 according to IEC 	61508		а	20		
Proportion of dange	erous failures					
 with low demand 	rate / according to SN	31920	%	40		
 with high demand 	d rate / according to SI	N 31920	%	73		
Failure rate (FIT valu	ue) / with low demand	d rate				
 according to SN 3 	31920		FIT	100		
Product function						
 mirror contact to 	IEC 60947-4-1			Yes		
 comment 				with 3RH29		
 positively driven 	operation to IEC 6094	7-5-1		No		
Certificates/appro	wals:					
General Product A			_	EMC	Functional Safety /	
	ppiorai			Lino	Safety of Machinery	
	(SA) CSA	GOST		С-тіск	Type Examination	
Declaration of Conformity	Test Certificates					
EG-Konf.	Special Test Certificate	<u>Type Test</u> Certificates/Test <u>Report</u>				
Shipping Approva	I					
ABS	BUREAU VERITAS	J Å DNV DNV	GL GL	Lloyd's Kegister	PRS	
Shipping Approva	I	other				
RINA	RMRS	Confirmation				
Further information	on:					

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)


http://www.siemens.com/industrial-controls/mall


Cax online generator


http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RT2028-1AB00/all


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT2028-1AB00







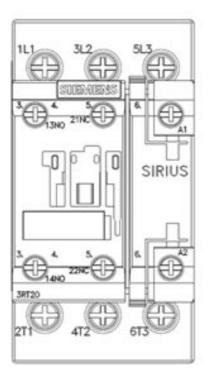

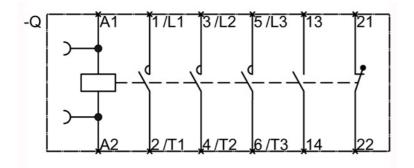

last change:

Feb 15, 2013