


SPARE PART SIMODRIVE 611 HF REACTOR 16 KW, UL

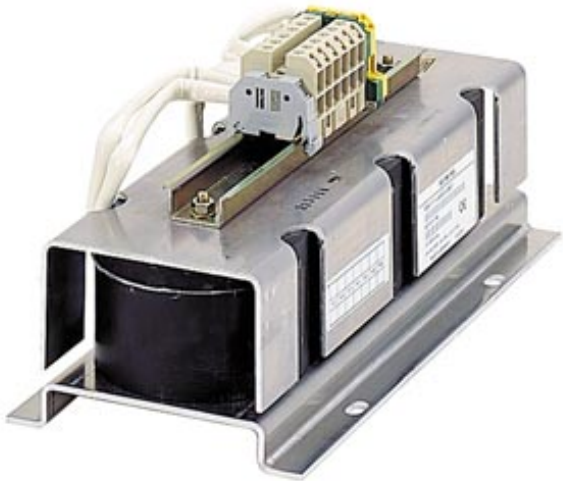

| | |
|-----------------------------------------------------------------------------|----------------------|
| Order number | 6SN1111-0AA00-0BA1 |
| Phase number / of the input voltage | 3 |
| Type of voltage / of the input voltage | AC |
| Input voltage | 380 ... 480 |
| Output current / rated value | 30 A |
| Power loss [W] | |
| • at 50 Hz | Wert fehlt! |
| • at 60 Hz | Wert fehlt! |
| Type of electrical connection | |
| • for mains supply line | screw-type terminal |
| • for load-side outgoing feeder | screw terminals |
| Type of connectable conductor cross-section / for load-side outgoing feeder | Wert fehlt! |
| Connectable conductor cross-section | |
| • for mains supply line | Wert fehlt! |
| • for load-side outgoing feeder | 16 mm ² |
| Type of electrical connection / for PE conductor | Screw-type terminals |
| Protection class IP | IP20 |
| Width | 150 mm |
| Height | 330 mm |

| | |
|------------|--------|
| Depth | 145 mm |
| Net weight | 8.5 kg |

Further information

Information und Download Center

https://www.automation.siemens.com/mcms/infocenter/content/en/Pages/order_form.aspx

Technical documentation

<http://w3.siemens.com/mcms/mc-solutions/en/motion-control/support/technical-documentation/Pages/technical-documentation.aspx>

Industry Mall

<https://eb.automation.siemens.com/mall/en/WW/Catagog/Product/6SN11110AA000BA1/all>

Industry Online Support

<http://support.automation.siemens.com/WW/view/en/6SN11110AA000BA1/all>