

CUBE67 BUS NODES


CANopen

CANopen

Connection cables are in the online shop under "Connection Technology".
Housing fully potted.

[Link to Product](#)

Illustration

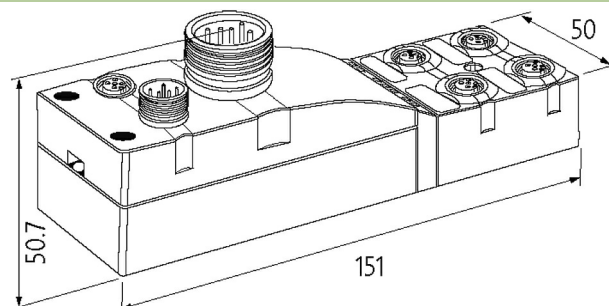

Product may differ from Image



General data

Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Protection	IP67
Dimensions H×W×D	151×50×50.3 mm

Module supply

Operating voltage	24 V DC (EN 61131-2)
Current consumption	max. 70 mA

Cube system

Module capacity	max. 16
-----------------	---------

Connections

Fieldbus	CAN 1 Mbit/s; M12, A-coded
Sensor-system/actuator supply	7/8", 5-pole, max. 9 A
Internal system connection	M12, 6 pole; max. 4 A

CANopen

Addressing	Rotary switch 1...99
------------	----------------------

Diagnostic

Communication status	via LED and BUS
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes

Commercial data

country of origin	DE
-------------------	----

customs tariff number	85389099
EAN	4048879048712
eClass	27242608
Packaging unit	1.000