


IA5052



Inductive sensor

IA-3010-APKG/10M

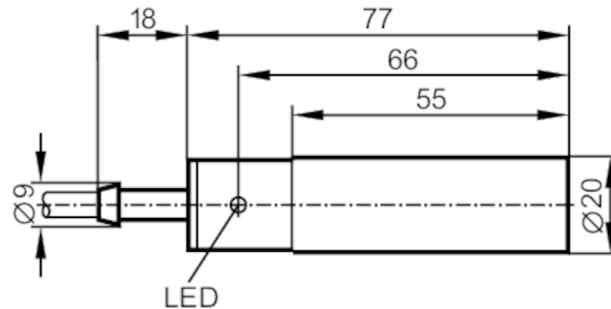

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	15; (24 V)
Protection class		II
Reverse polarity protection		yes

Outputs

Electrical design		PNP
Output function		normally closed
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	300
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes

Detection zone

Sensing range	[mm]	10
Real sensing range S_r	[mm]	$10 \pm 10 \%$
Operating distance	[mm]	0...8.1

Accuracy / deviations

Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2
Hysteresis	[% of S_r]	1...15
Switch point drift	[% of S_r]	-10...10

Operating conditions

Ambient temperature	[°C]	-25...80
Protection		IP 67

Tests / approvals

EMC		EN 60947-5-2
MTTF	[years]	1844

IA5052



Inductive sensor

IA-3010-APKG/10M

Mechanical data		
Weight	[g]	509.2
Housing		cylindrical
Mounting		non-flush mountable
Dimensions	[mm]	Ø 20 / L = 77
Materials		PBT


Displays / operating elements		
Display	switching status	1 x LED, yellow

Accessories	
Accessories (supplied)	Mounting clamps: 1

Remarks	
Pack quantity	1 pcs.

Electrical connection
Cable: 10 m, PVC; 3 x 0.5 mm²

Connection

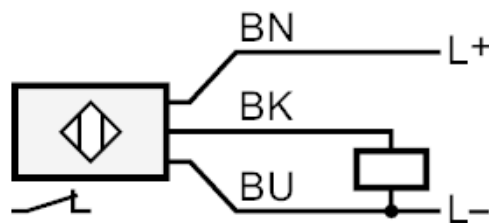

Core colours :

BN =	brown
BU =	blue
BK =	black