



65MM TERMINAL MODULE FOR F-DS1E-X WITH INFEED TERMINALS,
WITH CODING FOR TRIPPING GROUPS

General technical data:		
Product designation		Terminal module
Product-type designation		TM-FDS65-S32-01 FS L
Design of the product		for F-DS1e-x, with energy bus infeed, with caps
Mounting height	mm	290
Installation width	mm	65
Mounting depth	mm	100
Protection class IP		IP20
Insulation voltage / rated value	V	690
Operating voltage		
• for AC / rated value	V	500
Impulse voltage resistance / rated value	V	6,000
Operating current / rated value	A	50
Operating frequency		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Type of the connectable conductor cross-sections		
• solid		1x 10 mm ² , 2x (1 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²)
• finely stranded / with wire end processing		2x (1 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²), acc. to IEC 60947

- for AWG conductors

- solid
- stranded

2x (14 ... 10)

2x (14 ... 10)

Mounting/fixing:

Dimension de la tête de tournevis

Standard screwdriver Size 2

Tightening torque

- with screw-type terminals

N·m

2 ... 2.5

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK1903-3AC00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK1903-3AC00

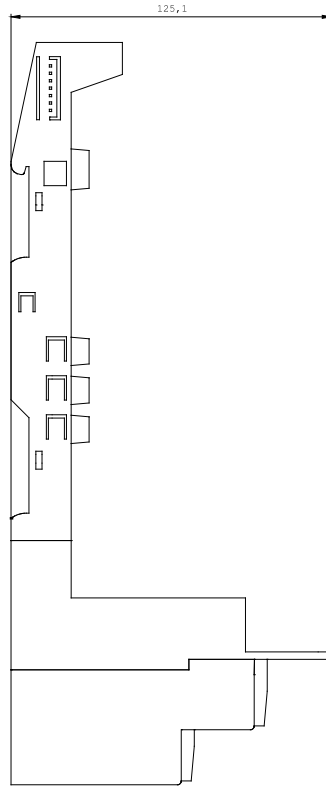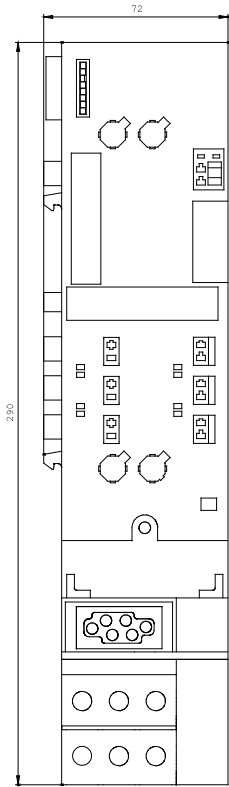

1/142...12
1/127...12

last change:

Mar 5, 2013