

CIRCUIT-BREAKER VL 400L WITHOUT ELECTRONIC TRIP UNIT VERY HIGH BREAKING CAPACITY ICU= 100 KA / 415 V AC,
 3-POLE IN= < 400 A,
 RATED CURRENT WITHOUT AUXILIARY RELEASE WITH SCREW CONNECTIONS FOR CONTACT UNIT AND OVERVOLTAGE RELEASE

Similar to image

General technical data:

Number of poles		3
Electrical operating cycles as operating time / typical		10,000
Mechanical operating cycles as operating time / typical		20,000
Product component		
• auxiliary switch		No
• Voltage trigger		No
• undervoltage release mechanism		No
• undervoltage release with leading contact		No
Product function		
• ground-fault protection		No
• for zero conductors / short-circuit and overload protection		No
• overload protection		No
Operating cycles / maximum	1/s	120
Protection class IP		IP20
Impulse voltage resistance / rated value	kV	8
Ambient temperature		
• during operating	°C	-25 ... +70
• during storage	°C	-40 ... +80

Main circuit:		
Insulation voltage / for AC / rated value	V	800
Operating frequency		
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Reference code		
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		Q
• according to DIN EN 61346-2		Q
Operating voltage / for main circuit		
• at 50 Hz / with AC		
• maximum	V	690
• at 60 Hz / with AC		
• maximum	V	690
Operating current		
• at 40 °C / rated value	A	400
• at 50 °C / rated value	A	400
• at 60 °C / rated value	A	372
• at 70 °C / rated value	A	344
Continuous current / rated value	A	400
Derating temperature / for the rated value of the continuous current	°C	50
• acc. to UL 489	°C	40

Auxiliary circuit:		
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0

Short-circuit:		
Breaking capacity limit short-circuit current (I_{cu}) / at 415 V / rated value	kA	100

Installation/mounting/dimensions:		
Mounting type		fixed mounting
Height	mm	279.5
Width	mm	139
Depth	mm	163.5

Connections:		
Arrangement of electrical connectors / for main current circuit		front side
Design of the electrical connection / for main current circuit		screw-type terminals

Certificates/approvals:		
-------------------------	--	--

General Product Approval

CCC



CSA



EG-Konf.

Test Certificates[Special Test Certificate](#)**Declaration of Conformity****Shipping Approval**BUREAU
VERITAS

DNV



GL



PRS






RINA



RMRS

other[Confirmation](#)[other](#)[Environmental Confirmations](#)**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3VL4740-3AA36-0AA0>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/3VL4740-3AA36-0AA0/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VL4740-3AA36-0AA0**CAX-Online-Generator**<http://www.siemens.com/cax>**Tender specifications**[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

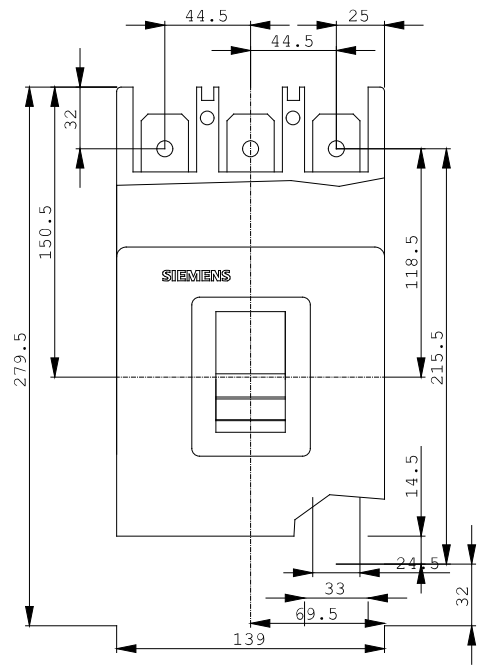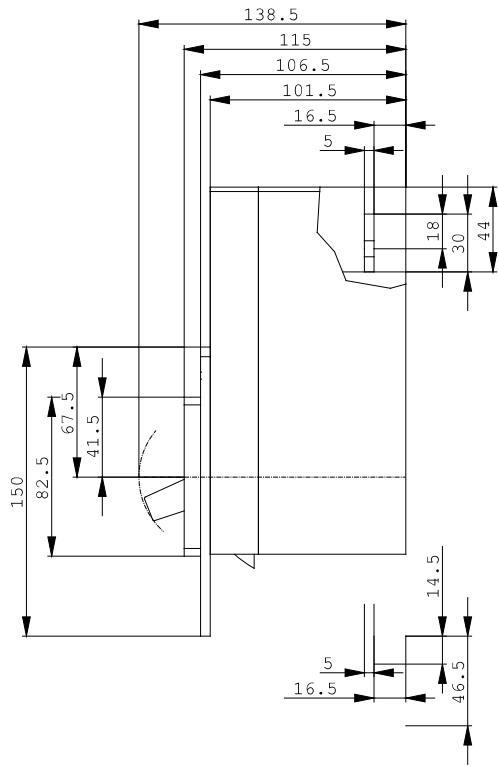

last change:

Jun 16, 2014