

Data sheet for SINAMICS G150



MLFB-Ordering data: 6SL3710-1GE38-4CA3-Z
D56+K95+M06+M90

Client order no.:
Order no.:
Offer no.:
Remarks:

Item no.:
Consignment no.:
Project:

Rated data

Input

Supply frequency	47...63 Hz
Input supply voltage	400 V ±10%
Rated input current	873 A
Max. current	1344 A
Pulse number	6
Regenerative capability	No (2Q)

Output:

Output voltage	400 V
Rated output (LO) in kW	450 kW
Rated power (HO) in kW	400 kW
Rated output current	840 A
Rated output current (LO)	820 A
Rated output current (HO)	700 A
Output current Max	1230 A
Pulse frequency (default setting)	1.25 kHz

Basic data:


Power losses ΔP	10.1 kW
Power loss including options	10.1 kW
Sound pressure level L_{pA} (1 m)	70 dB
Conductor cross section, max. (IEC)	8 x 240 mm ²
Degree of protection	IP20
Dimensions (H x W x D)	2100 mm x 600 mm x 600 mm
Weight approx.	670 kg
Frame size	H
Type	C (compact)
Color, paint shade	RAL7035

Environmental conditions

Installation altitude	1000 m
Coolant	Air
Air cooling requirements	0.78 m ³ /s
Ambient temperature	0 °C - +40 °C

Converter losses to EN 50598-2*

Efficiency class IE2
Comparison with the reference converter (90% / 100%) -56.28 %

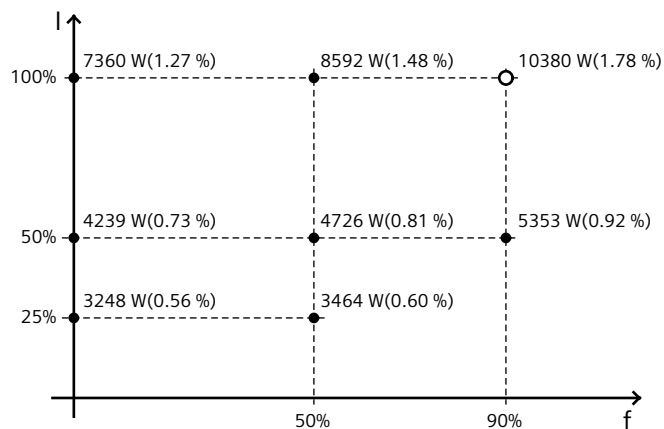

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter including line choke without options/components.

*converted values

Special design

D56	Documentation in a single language, Russian
K95	Control Unit kit CU320-2 PN (PROFINET, EtherNet/IP)
M06	Base 100 mm high, RAL 7022
M90	Crane transport assembly (mounted at the top)