

Data sheet for SINAMICS G150




MLFB-Ordering data: **6SL3710-1GE33-1CA3-Z**
D58+M06+M90+T58

Client order no.:
Order no.:
Offer no.:
Remarks:

Item no.:
Consignment no.:
Project:

Rated data		Converter losses to EN 50598-2*	
Input		Efficiency class	
Supply frequency	47...63 Hz		IE2
Input supply voltage	400 V ±10%	Comparison with the reference converter (90% / 100%)	
Rated input current	338 A	100%	-49.19 %
Max. current	495 A	3148 W(1.47 %)	
Pulse number	6	3645 W(1.70 %)	
Regenerative capability	No (2Q)	4441 W(2.07 %)	
Output:		50%	
Output voltage	400 V	1963 W(0.91 %)	
Rated output (LO) in kW	160 kW	2147 W(1.00 %)	
Rated power (HO) in kW	132 kW	1580 W(0.74 %)	
Rated output current	310 A	1660 W(0.77 %)	
Rated output current (LO)	302 A	2409 W(1.12 %)	
Rated output current (HO)	277 A		

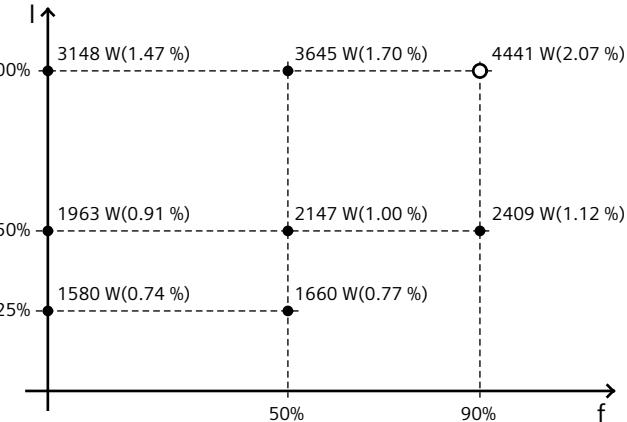

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter including line choke without options/components.

Pulse frequency (default setting) 2 kHz

*converted values

Basic data:	
Power losses ΔP	4.4 kW
Power loss including options	4.4 kW
Sound pressure level L_{pA} (1 m)	69 dB
Conductor cross section, max. (IEC)	2 x 240 mm ²
Degree of protection	IP20
Dimensions (H x W x D)	2100 mm x 400 mm x 600 mm
Weight approx.	300 kg
Frame size	G
Type	C (compact)
Color, paint shade	RAL7035

Special design	
D58	Documentation language: English/French
M06	Base 100 mm high, RAL 7022
M90	Crane transport assembly (mounted at the top)
T58	Rating plate data in English/French

Environmental conditions

Installation altitude	1000 m
Coolant	Air
Air cooling requirements	0.36 m ³ /s
Ambient temperature	0 °C - +40 °C