

IE-BS-V01M-SCRJ-SM**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Bayonet plug-in connector sets according to IEC
61076-3-106 ver.1 (EtherNet/IP), RJ45 metal insert incl.
SC insert

General ordering data

Version	Flange FO, IP67, Singlemode
Order No.	1221020000
Type	IE-BS-V01M-SCRJ-SM
GTIN (EAN)	4050118004113
Qty.	10 pc(s).

Creation date March 23, 2021 9:22:15 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

IE-BS-V01M-SCRJ-SM**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	37 mm	Depth (inches)	1.457 inch
Height	32 mm	Height (inches)	1.26 inch
Net weight	63.7 g	Width	32 mm
Width (inches)	1.26 inch		

Temperatures

Operating temperature	-40 °C...70 °C
-----------------------	----------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

General data

Colour	Miscellaneous	Connection 1	SCRJ
Connection 2	SCRJ	Fibre type	Singlemode
Housing main material	Zinc diecast	Insertion loss	≤ 0.5 dB
Plugging cycles	500	Protection degree	IP67
Return loss (attenuation)	≥ 40 dB		

General standards

Connector standard	IEC 61076-3-106 Var. 1, IEC 61754-24
--------------------	---

Classifications

ETIM 6.0	EC001122	ETIM 7.0	EC001122
ECLASS 9.0	19-17-01-22	ECLASS 9.1	19-17-01-22
ECLASS 10.0	19-17-01-22	ECLASS 11.0	19-17-01-22

Downloads

Approval/Certificate/Document of Conformity	PROFINET Manufacturer's Declaration
Engineering Data	STEP
User Documentation	MAN IE GUIDE DE MAN IE GUIDE EN Designation key / Type key Manual


IE-BS-V01M-SCRJ-SM

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

Drawings

www.weidmueller.com

Installation cut-out

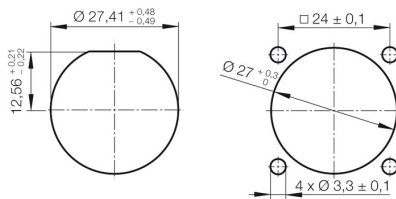

Mounting cut-out: 1. With central screw connection / 2. For mounting with four M3 screws