

HSS-HF 3/8 5.8-8.0/25Y


Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

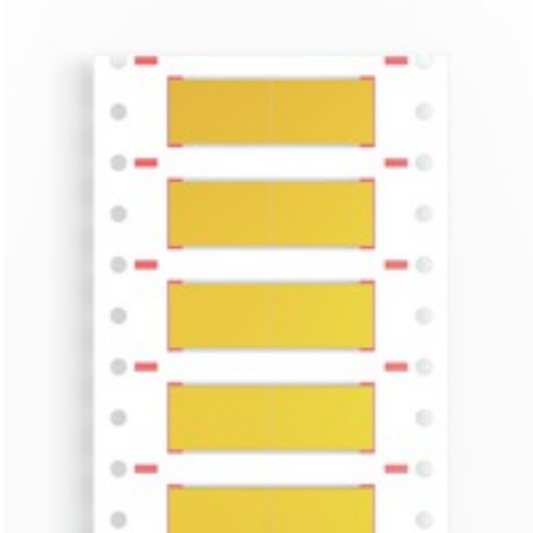

Similar to illustration



The heat-shrinkable sleeve is printable on 2 sides and can be used for marking and insulating cables and wires. The flexible, heat-shrink material enables a firm, perfect fit around the conductor and therefore saves space.

General ordering data

Version	Conductor and cable markers, 5.8 - 8 mm, {Reference (AttributeDefinition) not found: pAttr74196859207437}, yellow
Order No.	1962000000
Type	HSS-HF 3/8 5.8-8.0/25Y
GTIN (EAN)	4032248642694
Qty.	4,000 pc(s).
compatible printer	2599430000 2599440000 1140490000

Creation date March 26, 2021 3:33:23 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

HSS-HF 3/8 5.8-8.0/25Y

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Depth	0.77 mm	Depth (inches)	0.03 inch
Height	25.4 mm	Height (inches)	1 inch
Net weight	0.701 g	Width	16 mm
Width (inches)	0.63 inch		

Temperatures

Operating temperature range	-55...105 °C
-----------------------------	--------------

General data

Colour	yellow	Halogen	No
Material	Polyolefine	Material colour according to resistance code	4
Operating temperature range	-55...105 °C	Operating temperature range, max.	105 °C
Operating temperature range, min.	-55 °C	Recommended industries	Transportation
Type of printing	neutral	Width	16 mm

Conductor and cable markers

Conductor O.D.	5.8 - 8 mm	Conductor O.D., max.	8 mm
Conductor O.D., min.	5.8 mm	Conductor cross-section, max.	16 mm ²
Conductor cross-section, min.	10 mm ²	Cross-section for connected wire	10 - 16 mm ²
Halogen	No	Rate of shrinkage	2:1
Recommended shrinking temperature	90 °C	Text field height	15.25 mm
Text field width	25.4 mm		

Classifications

ETIM 6.0	EC001530	ETIM 7.0	EC001530
ECLASS 9.0	27-40-04-01	ECLASS 9.1	27-40-04-01
ECLASS 10.0	27-40-04-01	ECLASS 11.0	27-28-11-02

Approvals

ROHS	Conform
------	---------

Downloads

Approval/Certificate/Document of Conformity	NFX 70-100-1 2006 + NF X 70-100-2 2006 BS EN 45545-2 2013+A1 2015 BS EN ISO 4589-2 1999
Engineering Data	STEP
Engineering Data	EPLAN, WSCAD, Zuken E3.S

Data sheet**HSS-HF 3/8 5.8-8.0/25Y****Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 26
D-32758 Detmold
Germanywww.weidmueller.com**Drawings**

Bestellhilfe

HSS-HF 1/8" 1,2-2,8 / 50 Y

- Y = Gelb (W=Weiß)
- 50,8 mm Hüslenlänge (oder 25,4 mm)
- geeigneter Leiterdurchmesser
1,2 - 2,8mm
- Max. Außendurchmesser
1/8" (bzw. 3,2 mm)
- HF = Halogenfrei nach VDE 0472-615
- HSS = Heat Shrinkable Sleeve
(wärmeschrumpfender Schlauch)