

## SAIL-7/8BW-5-2.0U


**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)



Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

The 7/8" cables tend to be used for power supply applications.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

### General ordering data

|            |  |
|------------|--|
| Version    | Sensor/actuator line, One end without connector, 7/8", Number of poles : 5 (4 + PE), 2 m, Socket, angled, Shielded: No, LED: No, Sheath material: PUR, Halogen: No |
| Order No.  | <a href="#">1292200200</a>   |
| Type       | SAIL-7/8BW-5-2.0U  |
| GTIN (EAN) | 4050118088090  |
| Qty.       | 1 pc(s).   |

Creation date March 23, 2021 2:49:07 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**SAIL-7/8BW-5-2.0U****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Net weight 200 g

**Environmental Product Compliance**

REACH SVHC Lead 7439-92-1

**Technical specifications for cable**

|  |   |        |  |
|--|---|--------|--|
| Bending radius, min., moving                   | 7.5 x cable diameter                    |        |  |
| Cable length                                   | 2 m                                     |        |  |
| Colour coding                                  | brown, white, blue, black, Green/yellow |        |  |
| Configurable cable length                      | No                                      |        |  |
| Core cross-section                             | 1.5 mm <sup>2</sup>                     |        |  |
| Halogen  | No                                      |        |  |
| Housing main material                          | PUR                                     |        |  |
| Insulation                                     | TPM                                     |        |  |
| Number of poles                                | 5                                       |        |  |
| Number of poles                                | 5 (4 + PE)                              |        |  |
| Outer cladding in accordance with UL AWM style | 20234 (80 °C / 1000 V)                  |        |  |
| Outer diameter                                 | 8.7 mm                                  |        |  |
| Outside diameter                               | Diameter                                | 8.7 mm |  |
|  | Signs                                   | ±      |  |
|  | Tolerance                               | 0.2 mm |  |
| Outside diameter                               | 8.7 mm ± 0.2 mm                         |        |  |
| PE function                                    | Yes                                     |        |  |
| Resistant to welding beads                     | No                                      |        |  |
| Sheath material                                | PUR                                     |        |  |
| Sheathing colour                               | black                                   |        |  |
| Shielded                                       | No                                      |        |  |
| Suitable for cable carriers                    | No                                      |        |  |
| Temperature range, moving                      | -20...80 °C                             |        |  |
| Temperature range, moving, max.                | 80 °C                                   |        |  |
| Temperature range, moving, min.                | -20 °C                                  |        |  |
| Temperature range, stationary                  | -50...80 °C                             |        |  |
| Temperature range, stationary, max.            | 80 °C                                   |        |  |
| Temperature range, stationary, min.            | -50 °C                                  |        |  |
| Torsion resistance                             | 0 °/m                                   |        |  |

**General technical data**

|                        |                       |                              |                |
|------------------------|-----------------------|------------------------------|----------------|
| Coding                 | none                  | Connection thread            | 7/8"           |
| Contact surface        | Au (Gold)             | Housing main material        | PUR            |
| Insulation strength    | 10 <sup>8</sup> Ω     | LED                          | No             |
| Plugging cycles        | ≥ 100                 | Pollution severity           | 3              |
| Protection degree      | IP68, when screwed in | Rated current                | 9 A            |
| Rated voltage          | 300 V                 | Temperature range of housing | -25...+80 °C   |
| Threaded ring material | Diecast zinc          | Version                      | Socket, angled |
| jumpered               | No                    |                              |                |

Creation date March 23, 2021 2:49:07 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

2

**SAIL-7/8BW-5-2.0U**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Technical data****Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001855    | ETIM 7.0    | EC001855    |
| ECLASS 9.0  | 27-06-03-11 | ECLASS 9.1  | 27-06-03-11 |
| ECLASS 10.0 | 27-06-03-11 | ECLASS 11.0 | 27-06-03-11 |

**Approvals**

Approvals



|                       |         |
|-----------------------|---------|
| ROHS                  | Conform |
| UL File Number Search | E307231 |

**Downloads**

|                  |                              |
|------------------|------------------------------|
| Engineering Data | <a href="#">EPLAN, WSCAD</a> |
|------------------|------------------------------|

**Data sheet**


**SAIL-7/8BW-5-2.0U**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com


**Drawings**

**Dimensioned drawing**

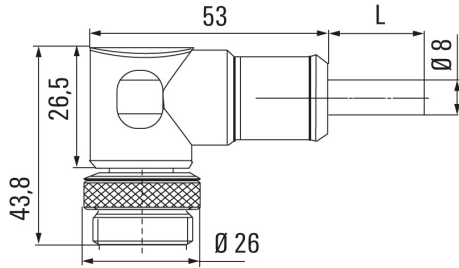


Angled socket

**Pole scheme**

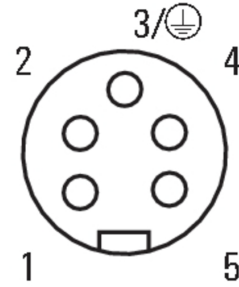

Socket

**Wiring diagram**

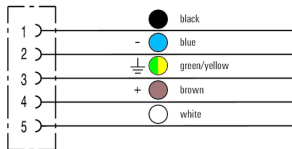

**The ideal tool: Screwty® with torque function**



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F