

# Product data sheet

## Characteristics

# XZCPV0766L2

pre-wired connectors XZ - elbowed female - M8  
- 3 pins - cable PVC 2m



### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

### Complementary

Electrical connection	Elbowed female connector, connector type: M8 3 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	2 PNP LEDs
Cable length	2 m
Cable outer diameter	4.6 mm
Cable composition	3 x 0.25 mm <sup>2</sup>
Wire insulation material	PVC
[Ue] rated operational voltage	36 V DC 30 V AC
[In] rated current	3 A
Contact resistance	<= 5000 µOhm
Insulating resistance	>= 1 GΩ
Product weight	0.09 kg

### Environment


IP degree of protection	IP65 IP67
Ambient air temperature for operation	-25...80 °C (static)
Ambient air temperature for storage	-25...80 °C

### Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1201 - <a href="#">Schneider Electric declaration of conformity</a>

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Dimensions

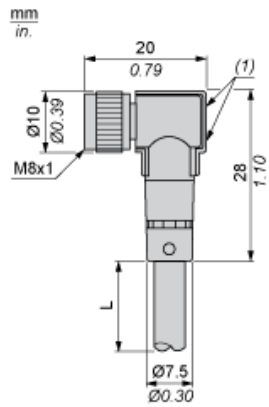


- L : Length of cable
- (1) 2 LEDs limited to 10...30 VDC max.

---

Connections and Schemes

---

Connector




BU : Blue  
BN : Brown  
BK : Black

---

Connections and Schemes

---

LED Connection



BN : Brown  
BK : Black  
BU : Blue  
GN : Green  
YW : Yellow  
(f) Signal